

BRUKSANVISNING INSTRUCTION MANUAL

namron

ALFA BOX 2


220-240V~50/60Hz LED 16W 350mA IP20





Total Effekt: 16W
LED effekt: 13,2W
Lumen chip: 1300lm
Lumen downlight: 1140lm
CRI: 95+
SDCM: ≤3
LED Chip: CREE
Fargetemperatur: 2700K
Lysspredning: 38° Tilt: 25°
Tetthetsgrad: IP20
Levetid: 50.000 timer L90

Total Power: 16W
LED power: 13.2W
Lumen chip: 1300lm
Lumen downlight: 1140lm
CRI: 95+
SDCM: ≤3
LED Chip: CREE
Colour Temperature: 2700K
Beam Angle: 38° Tilt: 25°
IP Rating: IP20
Lifetime: 50,000 hours L90

Montering / Mounting

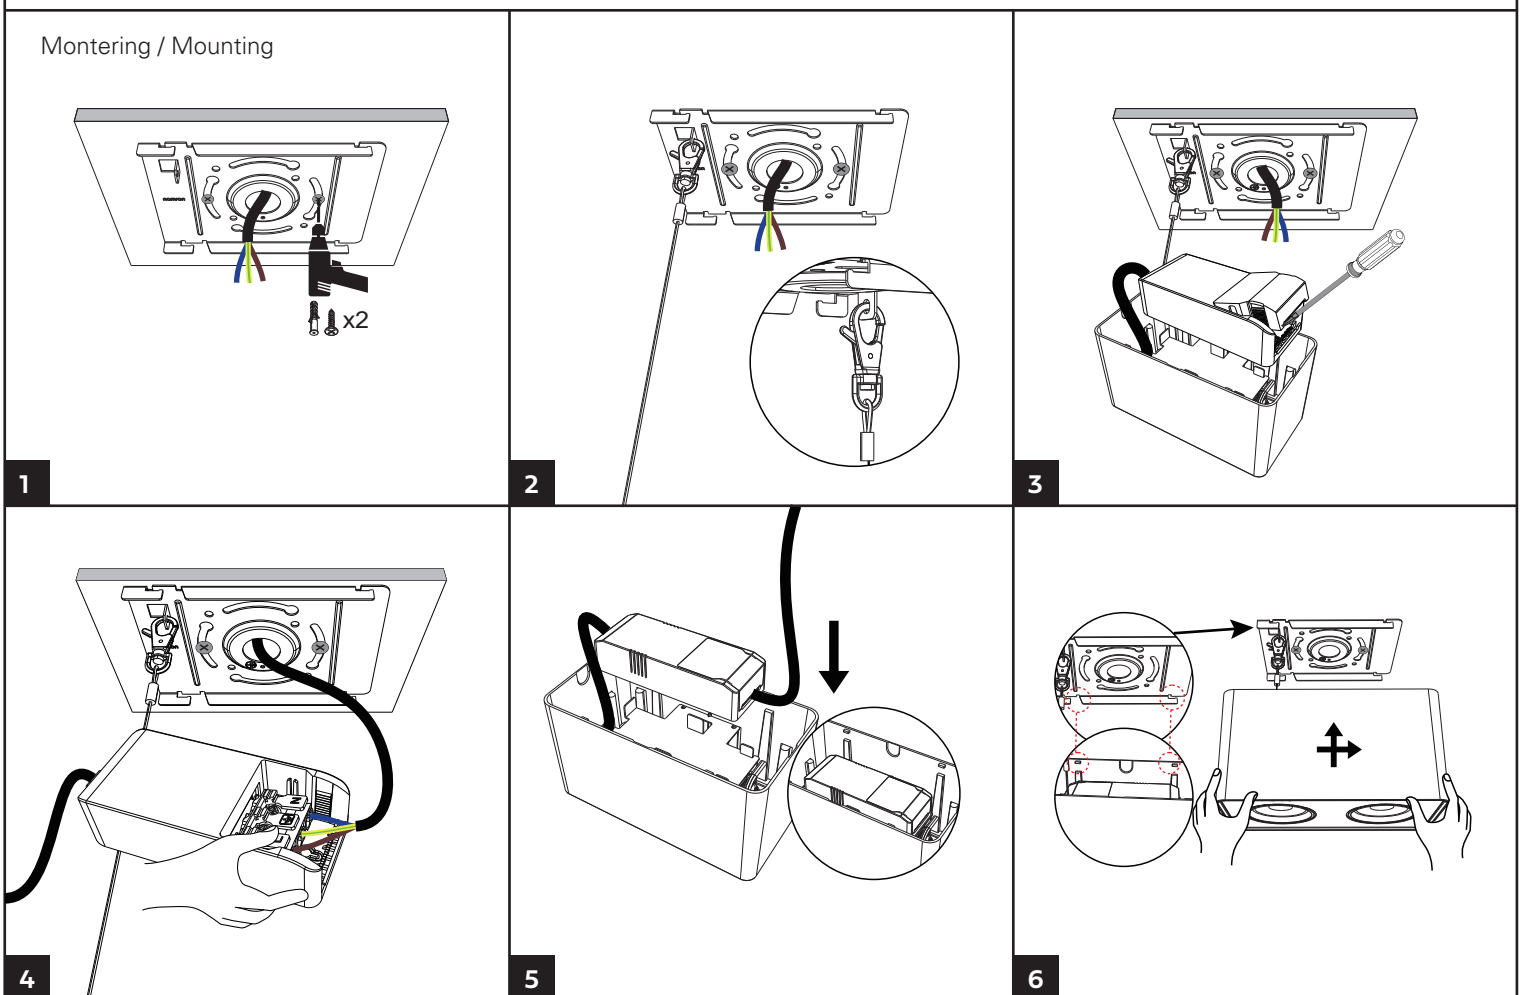


MÅL / MEASURES

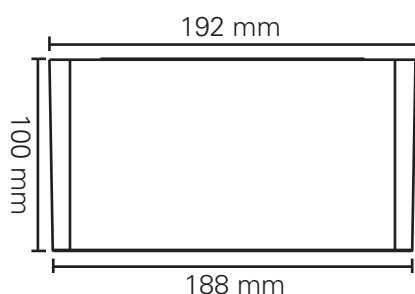

IP20

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction



Må installeres av registret elektroforetak.
Must be installed by registered electrical company.