

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(P _{out})	350mA LED	1	-	3	W
Input Current(I _{in})	25 °C, Nominal Input@230VAC	-	55	-	mA
Output Voltage(V _{out})		3	-	9	Vdc
Output Current(I _{out})	25 °C, Nominal Input	333	350	367	mA
Power Factor	Full Load	-	0.40	-	
Protection	Overload Protection		-		
	Short Circuit Protection		-		
	Over Heat Protection		-		
Ambient Temp.		-20	-	+50	°C
Case Temp. (T _c)	Normal Conditions	-	-	+70	°C
Lifetime	Full load @ Ta=50°C/110Vac , 220Vac	-	30,000	-	hrs


Lamp Type High Power LED 1.2W x 1~3

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

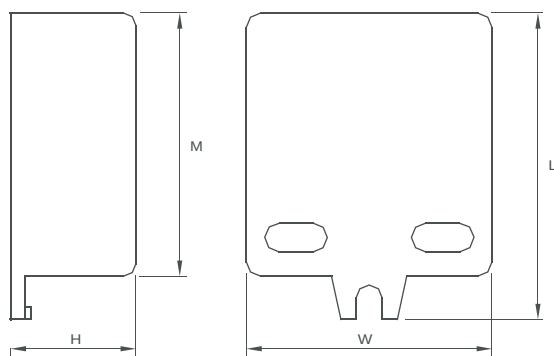

L : 48.8 mm H : 20 mm
M : 41.9 mm K :
N : R :

W : 39.1 mm

Tolerance : ≥0 ~ 100 ≥ +/-0.5mm
100 ≥ +/-1 mm

Terminal Block : PRI : Screw Type
SEC : Screw Type

Housing Material : Polycarbonate

Soldering : Lead-Free, Comply With RoHS

Label : Surface Print

Wiring Diagram

