

BRUKSANVISNING INSTRUCTION MANUAL

Namron Led Panel Back-Lit CCT 600×600/1200×300

220-240V~50/60Hz 40W

namron








LED Effekt: 40W
Spenning: 220-240V~50/60Hz
Lumen: 4800lm
Kelvin: CCT, 2700K/3000K/4000K
UGR: <19
SDCM: 3
IP: IP20
Levetid: 50.000t L80

LED Power: 40W
Voltage: 220-240V~50/60Hz
Lumen: 4800lm
Kelvin: CCT, 2700K/3000K/4000K
UGR: <19
SDCM: 3
IP: IP20
Lifetime: 50,000h L80

*Driver må kjøpes separat.

*Driver must be purchased separately.

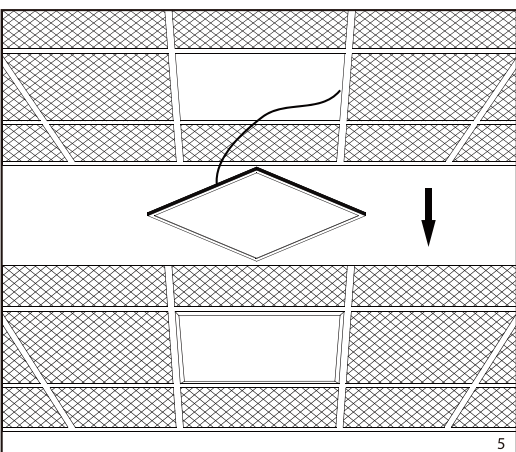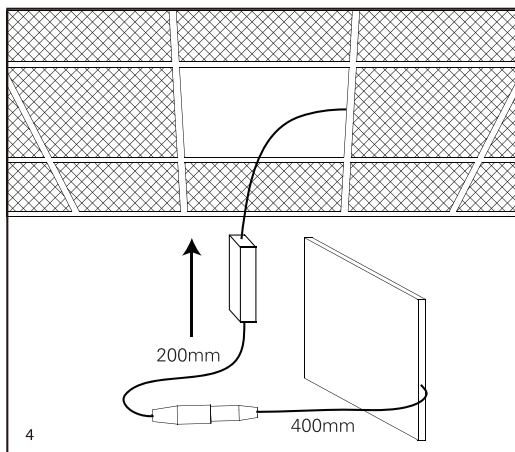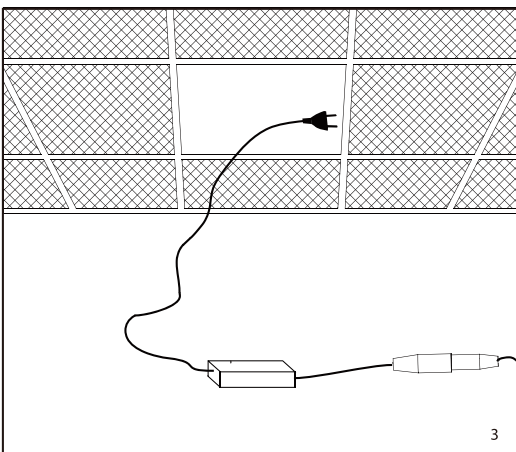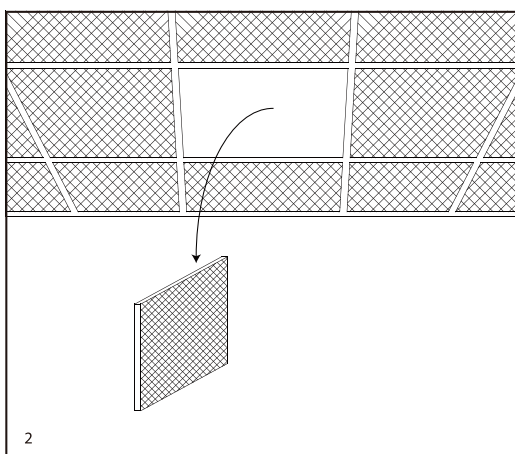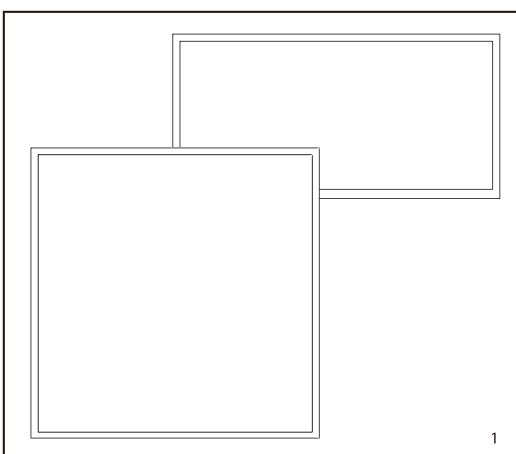



TILHØRENDE PRODUKTER / CORRESPONDING PRODUCTS

3215587/3215588
Kan brukes med driver som inkluderer 3 meter kabel og plugg
Art No.: 6603280, 6603276
6603267, 6603266

3215587/3215588
Kan monteres nedhengt i wire
Art No.: 3215514

3215587
Kan monteres utenpåliggende ved å benytte ramme
Art No.: 3215516
3215588
Kan monteres utenpåliggende ved å benytte ramme
Art No.: 3215517

MÅL / MEASURES

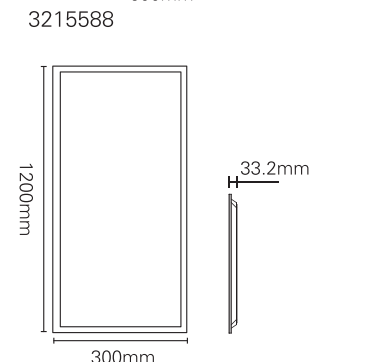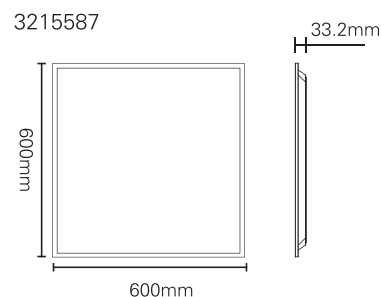

TIL INFORMASJON

1. Skal installeres av autorisert el-installatør.

ADVARSEL

1. Produsenten vil ikke holdes ansvarlig for feil installasjon, gal eller upassende bruk og uautorisert forandring av armaturen.
Hvis forandringer på produktet er påkrevet, konsulter forhandler for råd.

FOR INFORMATION

1. Installation must be performed by a registered electrician.

WARNING

1. The manufacture will not be held responsible for improper installation, faulty or improper use and unauthorized alteration of the luminaire. If changes of the product is required, consult the dealer for advise.

Minimumsavstand til brennbart materiale i armaturens stråleretning. / Minimum distance to flammable material in the beam direction.

