

BRUKSANVISNING INSTRUCTION MANUAL

Auris 1200/1500 led armatur 40W/55W


J&EL

220-240V~ 50/60Hz IP66


CE  IP66 

Spenning:	220-240V~ 50/60Hz	Voltage:	220-240V~ 50/60Hz
LED effekt:	40W/55W	LED power:	40W/55W
Lumen:	4800lm/6600lm	Lumen:	4800lm/6600lm
CRI:	80	CRI:	80
Lysspredning:	120°	Beam angle:	120°
Fargetemperatur:	4000K	Color temperature:	4000K
Tetthetsgrad:	IP66	IP rating:	IP66
Levetid:	25.000t	Lifetime:	25,000h
Dimbar:	Nei	Dimmable:	No
Isolasjonsklasse:	I	Isolation class:	I

Installasjon / Installation

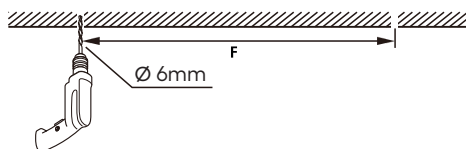

1. Bør et hull med diameter 6 mm / Drill a Ø 6mm hole

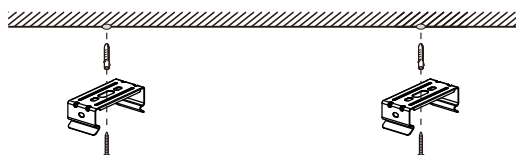







2. I henhold til senterposisjonen for monteringsfestet: Installer ekspansjonsbolter eller skruer, og monter brakettene. / According to the Fixing hole centre, instal expansion bolts and screws, instal the bracket.



3. Fest lampen i brakettene / Fix the luminaire with the brackets.







4. Fullfør installasjonen / Finish installation

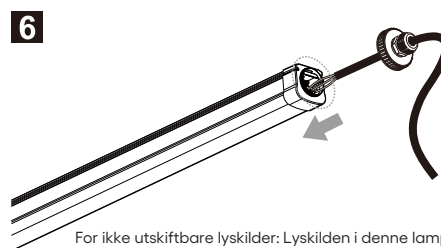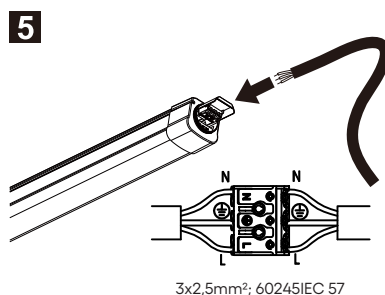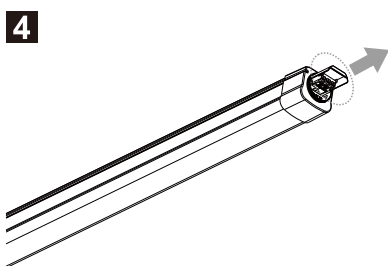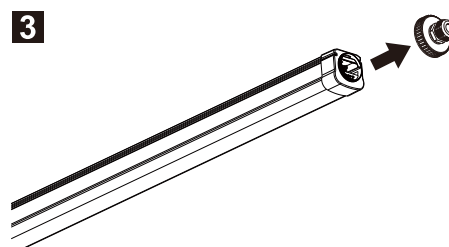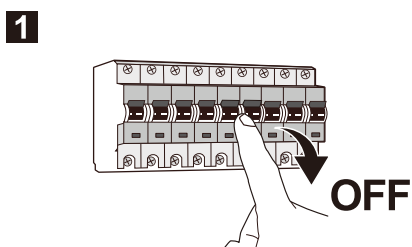

For ikke utskiftbare lyskilder: Lyskilden i denne lampen kan ikke skiftes ut. Når lyskilden slutter å lyse, må hele lampen skiftes ut.




For non-replaceable light sources: "The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced";

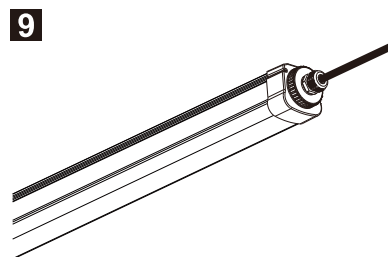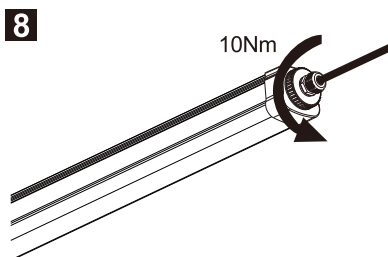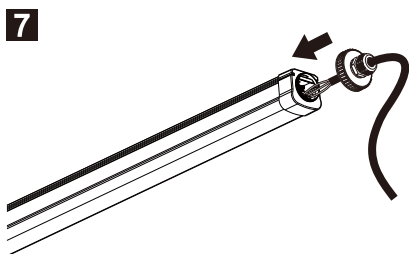

ADVARSEL / WARNING

Installasjon skal utføres av registrerte elektrikere.
Berør aldri armaturen når den er i drift.
Ved feil, slå straks av strømtilførselen og forsøk ikke å reparere produktet selv.
Reparasjoner skal kun utføres av registrerte elektrikere eller autorisert servicepersonell.

Installation should be done by registered electricians.
Never touch the working luminaire
In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
Repairment should only be done by registered electricians or official service agent.

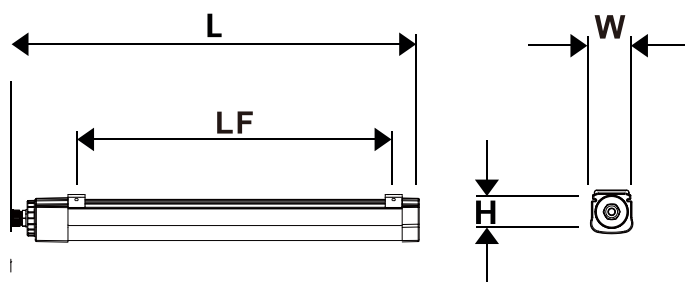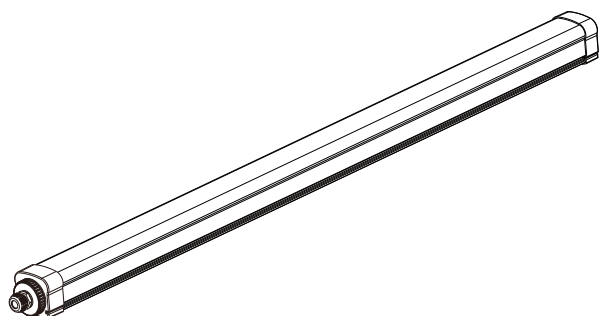

	L	W	H	LF
3306710	1160	68	65	1020
3306711	1460	68	65	1320