



CorePro LEDtube InstantFit HF T5



CorePro LEDtube HF 1500mm HO 26.7W 840T5

LED, T5, HF, 1500 mm, 26.7 W, 49W TL5 HO, 4000 K, 3900 lm, CRI 80, 50000 hour(s)

CorePro LEDtube InstantFit HF T5 is the quick and easy way to replace T5 fluorescent tubes with a fast payback time. Designed with industry leading ballast compatibility, the product is ideal for your everyday lighting jobs. With simply plug-and-play installation, it improves energy efficiency immediately and lasts for longer than conventional T5.

Product data

General Information			
Cap-Base	G5	Color rendering index (CRI)	80
Nominal lifetime	50,000 hour(s)	LLMF At End Of Nominal Lifetime (Nom)	70 %
Switching Cycle	50,000	Photobiological safety according to EN 62471	RG0
Lighting Technology	LED	Operating and Electrical	
Flux measurement reference	Sphere	Input Frequency	20K to 140K Hz
Warranty period	3 years	Power Consumption	26.7 W
Light Technical		Lamp Current (Max)	420 mA
Color Code	840 [CCT of 4000K]	Lamp Current (Min)	150 mA
Beam Angle (Nom)	200 degree(s)	Starting Time (Nom)	0.5 s
Luminous Flux	3,900 lm	Warm-up time to 60% light	0.5 s
Color Designation	Cool White (CW)	Power Factor (Fraction)	0.9
Correlated Color Temperature (Nom)	4000 K	Voltage (Nom)	60-120 V
Luminous Efficacy (rated) (Nom)	146 lm/W	LED alternative to fluorescent lamp power	49W TL5 HO
Color Consistency	<6	Inrush current at mains	-
		Max. lamp no. on MCB B type 10A - Mains	-

CorePro LEDtube InstantFit HF T5

Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – Mains	-
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Ballast Compatibility	HF

Temperature

T-Case Maximum (Nom)	45 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T5
Net Weight (Piece)	0.196 kg

Approval and Application


Energy Efficiency Class	D
-------------------------	---

Energy Saving Product	Yes
Approval Marks	RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	27 kWh
EPREL Registration Number	1857686
CE mark	Yes
EU RoHS compliant	Yes
Ambient temperature range	-20 to +45 °C

Product Data

Order product name	CorePro LEDtube HF 1500mm HO 26.7W 840T5
Full product name	CorePro LEDtube HF 1500mm HO 26.7W 840T5
Full product code	872016929566700
Order code	929003775402
Material Nr. (12NC)	929003775402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169295667
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169295674


Dimensional drawing

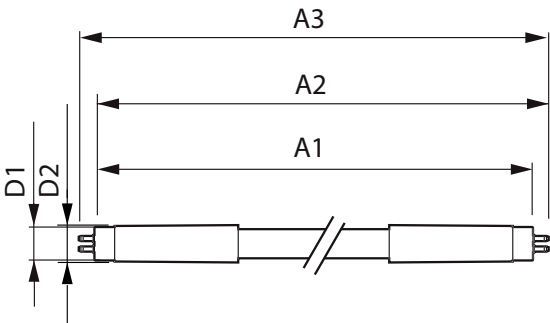


Product	D1	D2	A1	A2	A3
CorePro LEDtube HF 1500mm HO 26.7W 840T5	15.5 mm	16/19 mm	1,449 mm	1,456 mm	1,463 mm

CorePro LEDtube InstantFit HF T5


Photometric data

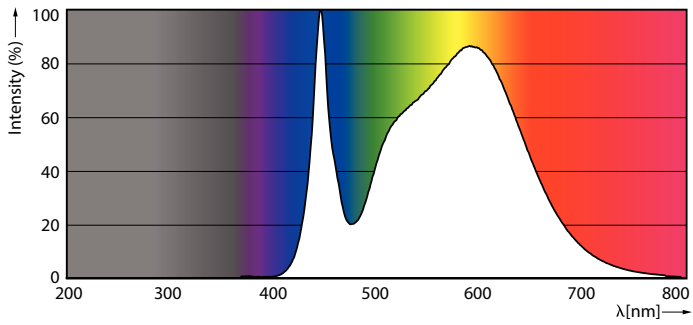

Spectral Power Distribution Colour - CorePro LEDtube HF 1500mm HO 26.7W 840T5




Light Distribution Diagram - CorePro LEDtube HF 1500mm HO 26.7W 840T5




General uniform lighting - CorePro LEDtube HF 1500mm HO 26.7W 840T5

Lifetime

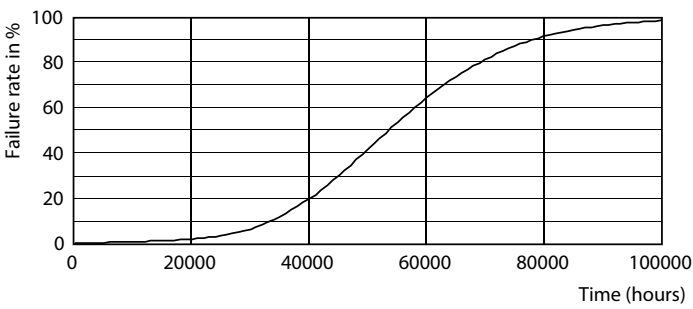

Life Expectancy Diagram

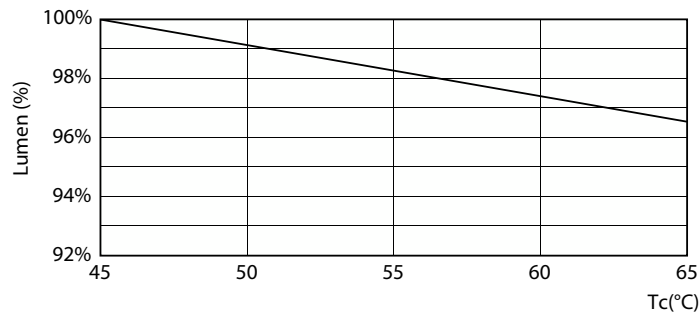

Lumen Maintenance Diagram - CorePro LEDtube HF 1500mm HO 26.7W 840T5

CorePro LEDtube InstantFit HF T5

Lifetime



FailureRate



LifetimeVsTc

Lumen Maintenance Diagram - CorePro LEDtube HF 1500mm HO 26.7W 840T5

