

BRUKSANVISNING INSTRUCTION MANUAL

USB A+C lader 3A

namron

100-240V~ 50/60Hz

CE IP 20 


Driftsspenning: 110-240V~50/60Hz
Input: 0,4A 100-240V~ 50/60Hz
Output:
Type A/C port: 5,0VDC 3,0A, 9,0VDC 2,0A, 12,0VDC 1,5A
Type A+C sammen: 5VDC 3,0A
Hurtiglading: QC 3,0 for både type A og C

Operating voltage: 110-240V~50/60Hz
Input: 0,4A 100-240V~ 50/60Hz
Output:
Type A/C port: 5,0VDC 3,0A, 9,0VDC 2,0A, 12,0VDC 1,5A
Type A+C together: 5VDC 3,0A
Quick charge: QC 3,0 for both type A and C

Gjennomsnittlig aktiv effektivitet: 82%
Effektivitet ved lav belastning(10%): 69%
Avslått: 0,05W

Average active efficiency: 82%
Efficiency at low load(10%): 69%
No-load power consumption: 0,05W

KOBLING / WIRING

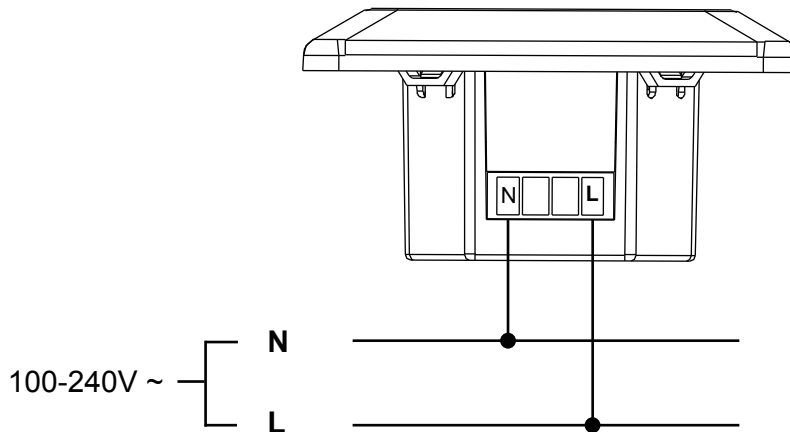

MÅL / MEASURES

