

IS 2160 ECO

white

EAN 4007841 606015

Article number 606015

infrared sensor
160°

max. 10 m

600 W

600W max.



IP54

40° horizontal, 70°
vertical

2 - 2000 lux



8 sec - 35 min



Ideal 2 m

5 years

manufacturer's
warranty steinel.de/
garantie

CE

Function description

This one sees everything. Infrared motion detector IS 2160 ECO for indoors and out, ideal for entrances and the smaller-size property, ideal installation height 2 m, 160° angle of coverage, max. reach 12 m (tangential), selectable time and twilight threshold, turns through 40° and tilts through 70°.

Technical specifications

Dimensions (L x W x H)	73 x 78 x 113 mm	LED lamps > 8 W	250 W
Manufacturer's Warranty	5 years	Capacitive load in µF	88 µF
Settings via	Potentiometers	Technology, sensors	passive infrared, Mixed light metering
With remote control	No	Voltage range (min)	230 V
Version	white	Voltage range (max)	240 V
PU1, EAN	4007841606015	Mounting height	1,80 – 3,00 m
Type	Motion detectors	Mounting height max.	3,00 m
Application, place	Outdoors, Indoors	Optimum mounting height	2 m
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway	Detection angle	160 °
Colour	white	Angle of aperture	40 °
Colour, RAL	9010	Sneak-by guard	No
Includes corner wall mount	No	Capability of masking out individual segments	Yes
Installation site	wall	Electronic scalability	No
Package content	1	Mechanical scalability	No
Installation	Surface wiring, Wall	Reach, radial	r = 3 m (13 m ²)
IP-rating	IP54	Reach, tangential	r = 12 m (201 m ²)

IS 2160 ECO

white
EAN 4007841 606015
Article number 606015



Technical specifications

Ambient temperature	from -20 up to +50 °C
Material	Plastic
Mains power supply	230 – 240 V / 50 Hz
Switching output 1, resistive	600 W
Fluorescent lamps, electronic ballast	250 W
Fluorescent lamps, uncorrected	500 VA
Fluorescent lamps, series-corrected	500 VA
Fluorescent lamps, parallel-corrected	500 VA
Switching output 1, low-voltage halogen lamps	500 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	125 W

Switching zones	260 switching zones
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Cable
Product category	Motion detector


IS 2160 ECO

white

EAN 4007841 606015

Article number 606015

Detection Zone

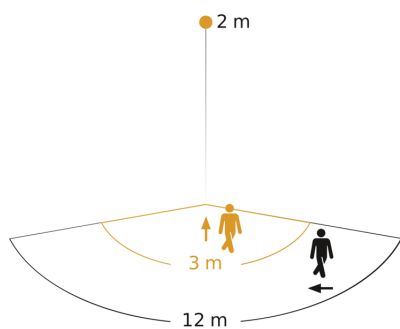


Possible mounting height: 1,80 m - 3,00 m

Orange: radial

Black: tangential

Dimension Drawing

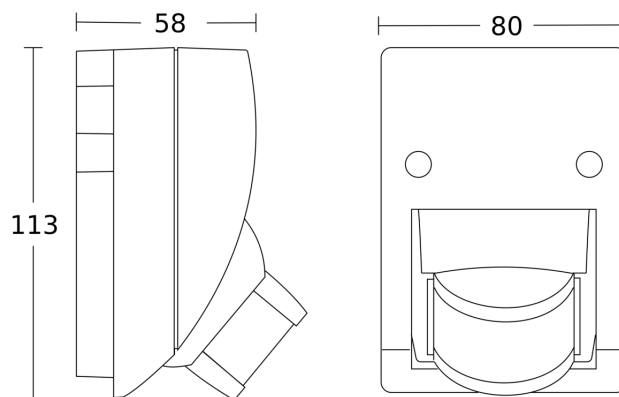

Circuit diagram

