


BRUKSANVISNING INSTRUCTION MANUAL LED WORK LIGHT

J&EL

100-240v 50 / 60Hz DC 5V IP44

CE III IP44 



Lader: 100-240v 50 / 60Hz DC 5V
Power bank-funksjon: USB-utgang 5V 1A
Strålevinkel: 120 °
Fargegjengivelsesindeks (RA): 80

Charger: 100-240v 50/60Hz
Emergency power output: 5V 1A
Beam angle: 120°
Color rendering index(RA): > 80

1. Work light head
2. LED lamp assembly
3. Portable bracket
4. Protective cover
5. USB socket
6. Micro socket
7. LED indicator
8. ON/OFF switch with mode function



Fig. 1

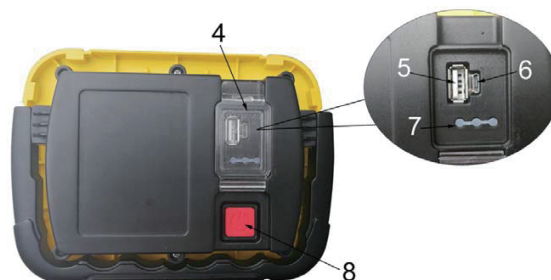


Fig. 2