

Timer switches

(GB)

Timer switch inserts

Ref.-no.: .. 11015 .., .. 11030 .., .. 11060 .., .. 11120 ..,
 .. 11030-20 .., .. 11120-20 .., .. 110.120 ..,
 .. 110.240 .., .. 110.360 .., .. 110.720 ..,
 8012 W, 8015 W

Covers

Ref.-no.: .. 1541 .., .. 1941 ..

Operating instructions

1 Safety instructions



Electrical devices may only be installed and connected by electrically skilled persons.

Serious injuries, fire or property damage possible. Please read and follow the instructions in full. These instructions are an integral part of the product, and must remain with the end customer.

2 Device components

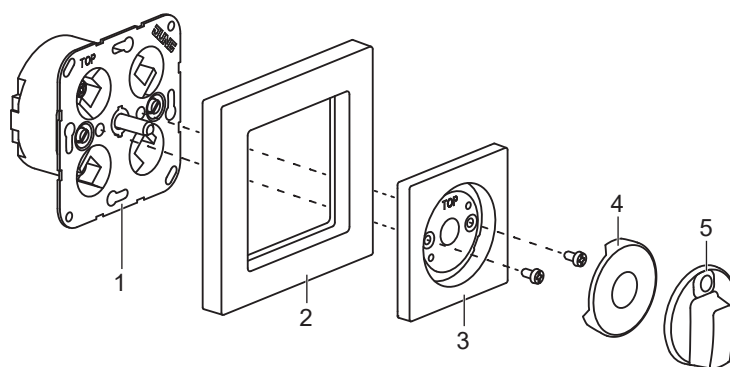


Fig. 1: Device components

- (1) Insert
- (2) Frame
- (3) Cover
- (4) Scale disc
- (5) Toggle

3 Function

Intended use

- time tolerance $\pm 10\%$
- resettable by means of slip clutch

Designs

11015 ..	2-pole, 1-way, max. 15 min.
8015 W	2-pole, 1-way, max. 15 min.
.. 11030 ..	2-pole, 1-way, max. 30 min.
.. 11030-20 ..	1-pole, 2-way, max. 30 min.
.. 11060 ..	2-pole, 1-way, max. 60 min.
.. 11120 ..	2-pole, 1-way, max. 120 min.
8012 W	2-pole, 1-way, max. 120 min.
.. 11120-20 ..	1-pole, 2-way, max. 120 min.
.. 110.120 ..	2-pole, 1-way, max. 120 min.
.. 110.120-20 ..	1-pole, 2-way, max. 120 min.
.. 110.240 ..	2-pole, 1-way, max. 240 min.
.. 110.360 ..	2-pole, 1-way, max. 360 min.
.. 110.720 ..	2-pole, 1-way, max. 720 min.

4 Information for electrically skilled persons

Mounting and electrical connection


DANGER

Electrical shock on contact with live parts in the installation environment.

Electrical shocks can be fatal.

Before working on the device, disconnect the power and cover live parts in the area!

- Connect the insert according to the connection diagram. (fig. 2)
- Install the insert in the appliance box.
- Mount the frame and centre plate.
- Switch on mains voltage.

5 Operation

The devices connected to the respective terminals are switched on or off according to the switch position.

Position 1 ... 720: time-controlled switched on

Position $\odot$: permanently switched off

6 Connection diagrams

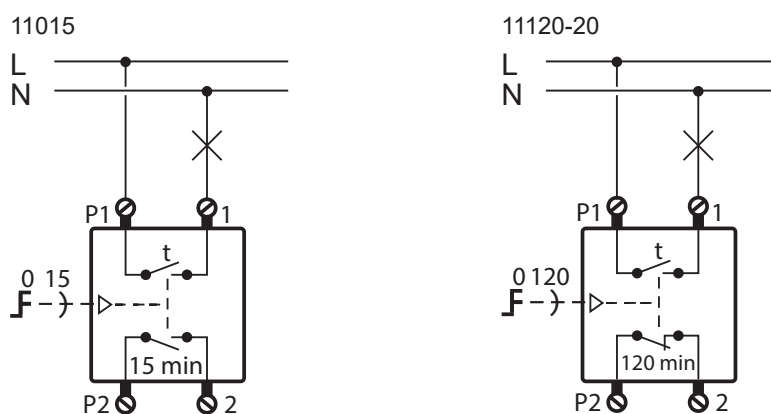


Fig. 2: Connection diagrams

7 Technical data

Rated voltage	AC 250 V ~
Rated current	16 AX
Connection	screw terminals
rigid and flexible wires	up to 4 mm ²

8 Accessories

Replacement scale disc	
11015	SKS 11015
11120-20	SKS 11120-20

9 Warranty

The warranty is provided within the framework of the statutory provisions via the specialised trade.