Solar lighting garland - 15 m long + 15 LED bulbs 0.1 W E27, 3000 K + 1 free bulb

Marka: **Virone** | Symbol: **LG-4/15M/E27/3** | Ean: **5908254852350**





PRODUCT DESCRIPTION

Create atmospheric lighting in your garden, on your terrace or during outdoor gatherings with this 15-meter solar garland. It is perfect for places without access to electricity – solar energy is enough to provide cozy lighting after dark.

The garland is equipped with 15 LED bulbs spaced evenly every 1 meter. They emit a warm 3000K light and create a pleasant atmosphere that promotes relaxation. The luminous flux of 10 lm per point delicately

ORNO GROUP Sp. z o. o. All rights reserved.

highlights the space, and the wide beam angle of 270° ensures even light distribution. The set also includes one additional spare LED bulb.

The built-in 2 × 1200 mAh battery is charged by a solar panel, so the lighting works completely wirelessly and does not generate energy costs. The power bank function (USB-A output) allows you to power small devices, and the USB-C input allows you to charge the garland with a classic charger - useful on cloudy days.

You may position the solar panel towards the sun using the included accessories. Stable brackets allow for both wall and ground mounting.

The set includes a remote control (range 5-7 m) that offers 8 operating modes – from continuous light, through flickering, to delicate light transitions. You may also adjust the brightness and set the automatic lighting time.

The garland is protected against moisture and dust (IP44), so it can be used outdoors all season long – on the terrace, balcony, or in the garden.

The long LED life of 30,000 hours and 15,000 switching cycles guarantee long-lasting operation.

TECHNICAL DATA

General information:

Lamp voltage [V]:	3,7
Lamp type:	Żarówka
Lamp power [W]:	15x0,1
Luminous flux [lm]:	15x10
Degree of protection (IP):	IP44
Rated life time L70/B50 at 25 °C [h]:	30000
Cycle on/off:	15000
Colour temperature [K]:	3000
Colour of light:	Ciepła biel
Colour rendering index CRI:	80-89
Beam angle (°):	270
Number of nodes per meter:	1
Length [mm]:	15000

ORNO GROUP Sp. z o. o. All rights reserved.

Voltage type:	DC
Conductor cross section [mm▯]:	2x0,5
Other features:	Opcja powerbank 2x1200mAh (wyjście USB A), możliwość ładowania ładowarką sieciową 5V DC (wejście USB C), pilot zdalnego sterowania z 8 trybami pracy i funkcją ściemniania






ORNO GROUP Sp. z o. o. All rights reserved.





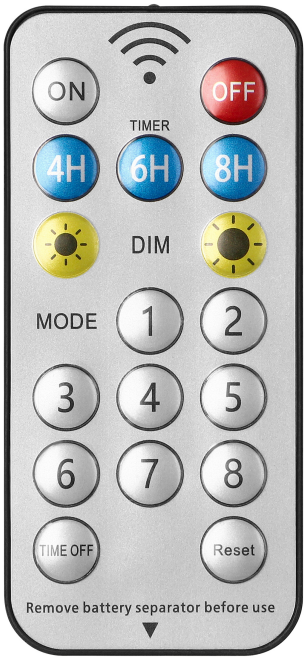

ORNO GROUP Sp. z o. o. All rights reserved.