

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: J&EL

Supplier's address: customer service, Nedre kalbakkvei 88B, 1081 Oslo, NO

Model identifier: 3215521

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	N/A		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	500 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	7,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, lighting control	Height	45	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	95	
	Depth	45	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,410
Parameters for directional light sources:			
Peak luminous intensity (cd)	873	Beam angle in degrees, or the range of beam angles that can be set	90
Parameters for LED and OLED light sources:			
R9 colour rendering index value	78	Survival factor	1,00
the lumen maintenance factor	0,97		

(a): not applicable;

(b): not applicable;

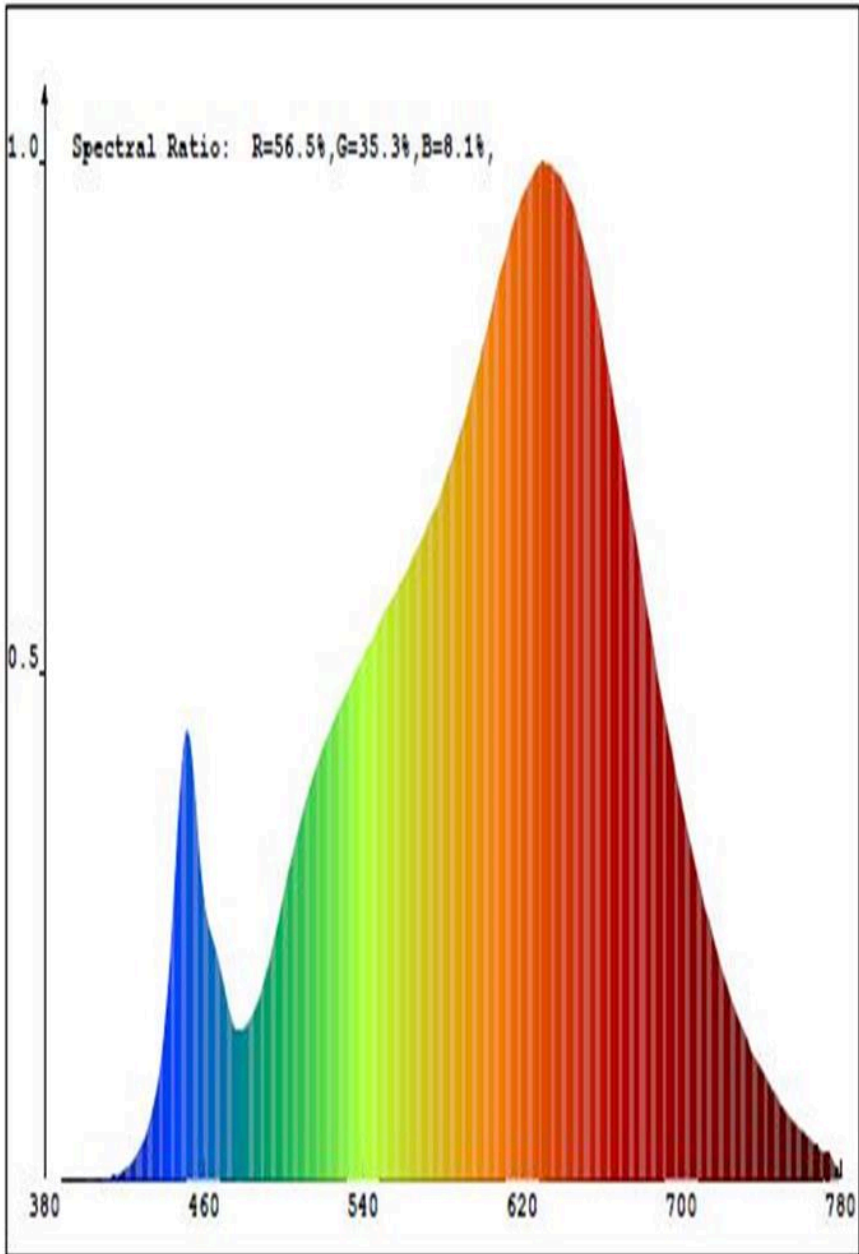

SDCM: 2.0 SDCM

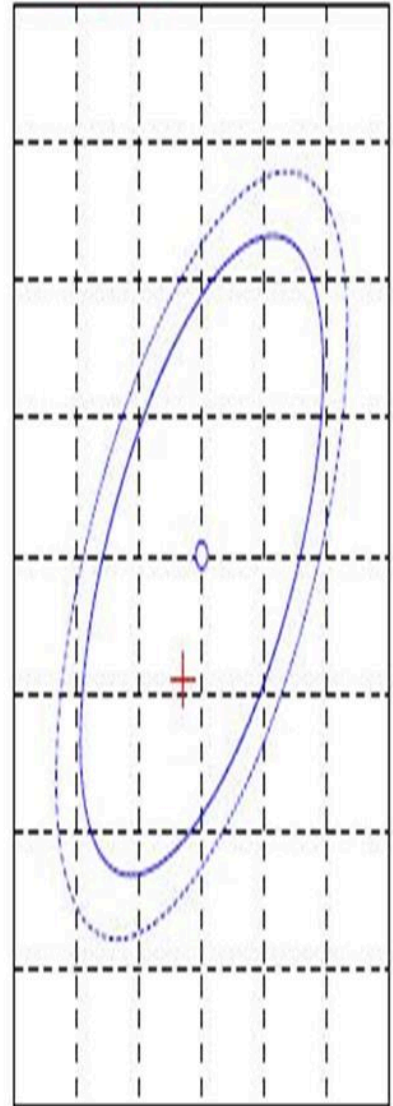

x=0.458 y=0.410 ANSI-C78-377/2700K

Model placed on the Union market from 30/05/2024



EPREL registration number: 2040472

<https://eprel.ec.europa.eu/qr/2040472>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: customer service

Website: www.namron.com

Email: post@namron.com

Phone: 22 81 27 70

Address:

Nedre kalbakkvei 88B

1081 Oslo

Norway